

Avtron AV6A Absolute Encoder



**AV6A Optical Rotary Absolute
Encoders, 58mm flange, solid shaft**

Optical Precision in a Compact Encoder

Industry Standard 58mm Size

Up to 30 Bit Resolution

Unbreakable Optical Disk

Singleturn or Multiturn

IP66 Rating

Superior Bearings and Seals

No Batteries

-40°C to +85°C Operation

2 Year No-Hassle Warranty

AV6A

AV6A absolute rotary encoders fit industry standard 58mm flanges, yet are superior to ordinary absolute encoders. Also available: HS6A hollow shaft models, AV6M magnetic absolute encoders, AV30 severe-duty absolute magnetic encoders with 58mm, 2.5", and 85mm flange mounting.


AV6A encoders have superior shaft seals and bearings that stay sealed to keep contaminants out, despite temperature cycles or liquid sprays. Our encoder seals are protected by mechanical barriers to prevent flexing or failure. Avtron's superior bearings permit much larger side and axial loads.

Many competitive optical encoder designs risk sensor damage from any vibration or shock. Some designs even use thin glass disks in "industrial" products! Avtron uses only unbreakable disks.

The AV6A offers a broad range of communication options, from parallel output and SSI to the latest Profibus and Ethernet standards.

Our optical AV6A encoders use superior sensor, disk, bearing, and seal technology to give top performance in industrial conditions. Select an Avtron AV6A today!

OUTLINE DRAWING

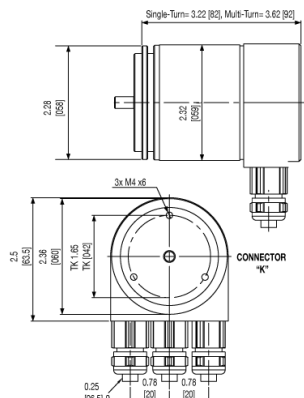

MORE AV6A ADVANTAGES

- More than 2X the axial and side load capability of the competition
- Ultra-long-life internal gearbox
- Software-settable zero point for SSI and parallel output
- Optional factory-programmable cam limits
- Optional 5V operation
- Protected against reverse power wiring
- Stainless steel shaft standard
- Optional all-stainless construction
- Profibus DP & ProfiNet Support for Class 1 & 2 & DPV2 Isochronous (ProfiDrive)

MORE AV6A SPECIFICATIONS

Operating Power: Volts: 10 - 30 VDC

Current: 230 mA at 10 V, 100 mA at 24 V maximum*

Output Formats: Ethernet/IP, Modbus TCP, Profinet, POWERLINK, Profibus, CANopen, DeviceNet, SSI, Parallel*, EtherCAT

Accuracy: +/-0.02° (+/-1 arc-min)

Shaft Loading: axial 9 lbs [40 N], radial 25 lbs [110 N]

Temperature: -40° to 85°C

Environment: Up to IP67**

Vibration: 10G, 10-1000Hz

Shock: 100G, 6ms duration

Weight: 1.21lb [550g]; stainless option 2.7lb [1200g]

*(Parallel requires 400mA @ 10V or 180mA @ 24V)

**with certain stainless steel housing configurations

Check out our website for more detailed specifications, drawings, and installation instructions. www.avtronencoders.com



Nidec Industrial Solutions
243 Tuxedo Avenue - Cleveland, Ohio 44131
encoderhelpdesk@nidec-industrial.com
+1 216-642-1230 - www.avtronencoders.com



Features and specifications are subject to change without notice. EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™, SAFETach™, and BULLSEYE32™ are trademarks of Nidec Industrial Solution. All other trademarks and registered trademarks are the property of their respective owners. Nidec Industrial Solutions' standard warranty applies. All dimensions approximate.

SELECTION GUIDE

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MODEL	COMMUNICAT ION BUS	FLANGE	SHAFT SIZE	URNS/BITS/M T	CPR/BITS PER TURN/ST	CONNECTOR	CONNECTOR EXIT	OUTPUT CODING	IP RATING	MODIFICATIO NS
AV6A	C - CANopen Communication D - DeviceNet (Slave) Communication K - POWERLINK Communication L - Parallel Output M - Modbus TCP/IP Communication N - Profinet Communication P - Profibus DP (slave) Communication R - EtherNet/IP Communication S - SSI Communication T - EtherCAT Communication	1 - 58mm Flange clamp style, 36mm male pilot, 3X M3, 3X M4 @ 48mm BC 2 - 58mm Flange EU servo/synchro, 50mm male pilot, 3X M4 @ 42mm BC 4 - 2.5 in. Square flange, 1.25 in. male pilot	B - 3/8 inch x 5/8 inch long Solid Shaft, w/flat (flange #4 only) C - 10mm x 20mm long Solid Shaft, w/flat (flange #1 or #2 only) T - 6mm x 10mm long Solid Shaft, no flat (flange #2 only)	X - 0 Turns/0 bits- Single Turn A - 16 Turns/4 bits D - 128 Turns/7 bits E - 256 Turns/8 bits 2 - 4096 Turns/12 bits 4 - 16384 Turns/14 bits	E - 256 Counts per Revolution/8 bits F - 512 Counts per Revolution/9 bits 0 - 1024 Counts per Revolution/10 bits 2 - 4096 Counts per Revolution/12 bits 3 - 8192 Counts per Revolution/13 bits 4 - 16384 Counts per Revolution/14 bits 6 - 65536 Counts per Revolution/16 bits	A - 1xM12/5 pin w/o Plug B - 2xM12/5 pin w/o Plug C - 3xM12 (4/4/4 pin) w/o Plugs D - 2xM12 (4/5 pin) w/o Plugs E - 1xM12/8 pin w/o Plug F - M23/12 pin w/o Plug G - M27/26 pin w/o Plug J - 2x Cable Entry K - 3x Cable Entry Q - M23/12 pin w/o Plug, Kubler Pin Out R - M23/16 pin w/o Plug W - Cable, 1m (or special length)	A - Side/Radial exit E - End/Axial exit	1 - Binary Bit Coding 2 - Gray Coding	X - No Seals, IP54 (not recommended) A - IP65 Shaft Seals G - IP66 Shaft Seals S - IP67 Shaft Seals, stainless housing	000 - No Special Features 901 - 1 ft. 0.3m Cable Built into Encoder 902 - 2 ft. 0.6m Cable Built into Encoder 903 - 3 ft. 0.9m Cable Built into Encoder 905 - 5 ft. 1.5m Cable Built into Encoder 910 - 10 ft. 3m Cable Built into Encoder 915 - 15 ft. 4.5m Cable Built into Encoder 920 - 20 ft. 6m Cable Built into Encoder 925 - 25 ft. 7.5m Cable Built into Encoder 930 - 30 ft. 9m Cable Built into Encoder 933 - 33 ft. 10m Cable Built into Encoder